




DATA SHEET

DIESEL GENERATOR 30KVA

MODEL#HDC-30G1

50HZ/1500RPM

CUMMINS MODEL: 4BT3.9-G1

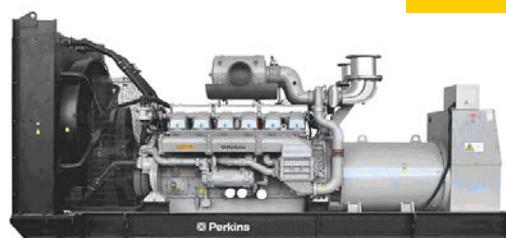

General Features:

- All qualified generator sets are subjected to a comprehensive performance test which includes 50% load, 70% load, 100% load, 110% load and to check, verify that all control systems, alarm and shut-down protection.
- Equipped with battery charger and 24V high performance maintenance-free lead-acid starting batteries and connecting cables.
- Stainless galvanized zinc plates with strong corrosion-proof.
- Vibration isolators between the engine/alternator and base frame.
- Equipped with industrial silencer and flexible exhaust hose.
- **Designed to comply with ISO8528/GB2820.**
- Powered by Cummins engine and coupled with Leroy Somer alternator.

HDP Diesel Generator Set Data

Genset Model	HDC-30G1
Prime Power	24KW/30KVA
Standby Power	26KW/33KVA
Output Frequency / Rated speed	50Hz/1500rpm
Rated Voltage	230V/400V

Engine Make	Cummins
Engine Model	4BT3.9-G1
Alternator model	Leroy Somer LSAA2.2L9
Control System	DSE4520
Phase	Three

(1) **Prime power:** The rating is available for an unlimited of annual operating hours in variable load applications, in accordance with ISO8528-1.A 10% overload is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1.

(2) **Standby power:** The rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.

(3) **Rated voltage:** available with customer requirement.

Engine Specifications (DETAILED in APPENDIX)

Engine Model	4BT3.9-G1
Engine Manufacturer	Cummins
Cylinder quantity	4
Cylinder Arrangement	In-line
Cycle	4
Aspiration	Naturally

Bore x Stroke (mm x mm)	102 mm×120 mm
Displacement	3.9L
Compression Ratio	17.3:1
Prime power / Speed (KW/RPM)	24.0 kw/1500
Standby power/ Speed (KW/RPM)	26 KW/1500
Governor type	Electric



ISO9001:2008

HDPG reserves the right to change the specifications and designs without notice.



Piston Speed	6.35m/s	Fuel Consumption at 100% load	7.1 L
Typical genset electrical output (0,8 pf 25°C)	24kw	(L/HOUR)	
Total Lubrication System Capacity (L)	8.3	Starter motor	12V
Coolant Capacity (L)	4.4	Alternator	12V
		Minimum cranking speed.	120rpm

Alternator Specifications

Alternator model	LSAA2.2L9
Alternator manufacturer	Leroy Somer
Exciter type	Single bearing, Brushless, Self-excited
Rated output prime power	30 KVA
Rated speed	1500 rpm
Rated frequency	50Hz

Number of phase	3
Rated voltage	400V
Power factor	0.8
Voltage regulation NL-FL	≤±1%
Insulation grade	H
Protection grade	IP23

Alternator option: Stamford, MECC, Marathon, Engga, Faraday

Control System DSE4520 (DETAILED in INSTRUCTION)

DSE4520 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains are abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

FEATURES

- Microprocessor control, with high stability and credibility.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms.
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable.
- Real time clock for time and date display, overall runtime display, 250 log entries.
- Overall power output display.
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol.

Soundproof Enclosure Specification

HDG silent generator is designed by professional acoustic engineers based on years of experience. Now we can make the noise of the generator less than 80-85dB(A) at 1m, or 70-75dB(A) at 7m, 60-65dB(A) at 15m.

FEATURES

- Multi-way air intake and exhaust guarantee the power performance of the generator.
- Large-scale impedance combined type silencer effectively reduce noise of the generator.
- Internal high performance rubber damper and flexible materials reduce vibration.
- Base mounted fuel tank supports the generator running for 8 hours.



ISO9001:2008

HDG reserves the right to change the specifications and designs without notice.

HYPER DYN POWER SOLUTIONS

POWER GENERATOR MANUFACTURES

Grugaplatz 2-4, 45131 Essen, Germany

Since 1990



www.hyperdyno.eu
support@hyperdyno.eu

We follow International Environment Protections Standards Worldwide,
United Nations Environment Programme (UNEP);
European Environment Agency (EEA);
Partnerships in Environmental Management for the Seas of East Asia (PEMSEA)



HAMANN AG

Sound level

Overall sound pressure level (cooling pack and air cleaner fitted):

- at 1500 rev/min	75 dBA
- at 1800 rev/min	85 dBA

Exhaust system

Maximum back pressure

- 1500 rev/min	10 kPa
- 1800 rev/min	15 kPa
Exhaust outlet size	56 mm (2.2 in)

Emission Standards: Meets Tier 2 or Tier 3 EPA emissions standards